

## FEATURES

- Ceramic brazing sealed technology guarantees no risk of arc leaking and ensures no fire or explosion
- Filled with gas (mostly hydrogen) to minimize contact oxidation and damage from arcing; the contact resistance is low and stable
- Contact part can meet IP67 protection level
- Current rated load continuously at 85°C
- Insulation resistance is 1000M $\Omega$  (1000VDC),and dielectric strength between the coil and contacts is 4.0kV ,which meets the requirements of IEC 60664-1

## APPLICATION

New energy vehicle  
Energy storage  
Charging pile  
Solar



## CONTACT DATA

Main Contact Arrangement	1 Form A
Initial Contact Voltage Drop	$\leq 150\text{mV}$ at 500 A
Rated Current (resistive load)	500 A (@ 200mm <sup>2</sup> )
Rated Switching Voltage	1000VDC
Min.Applicable Load	6VDC, 1 A
Max. Switching Power (1000VDC)	500kW
Max. Breaking Current	2000A (450VDC)

## COIL DATA @ 23°C

Nominal Voltage (VDC)	Coil Power (W)	Nominal Current (A)	Coil Resistance ( $\Omega \pm 10\%$ )	Pick-up Voltage (VDC)	Drop-out Voltage (VDC)
12	6	0.50	24	9.0 Max.	1 Min.
24	6	0.25	96	18.0 Max.	2 Min.

## ENDURANCE

Electrical Life (resistive Load)	Breaking: 50 ops (1000 VDC,500A)
	Breaking: 100 ops (750 VDC,500A)
Electrical Life (Capacitive Load)	接通: $2.5 \times 10^4$ ops (37.5 VD, 500A; $\tau=1\text{ms}$ , $C=1100\mu\text{F}$ )
	接通: 1ops (300VD, 1350A; $\tau=1\text{ms}$ , $C=1100\mu\text{F}$ )
Current Enduranc	500A, 持续
	600A, 10分钟
	700A, 1分钟
	2000A, 0.6秒
Mechanical endurance	$1 \times 10^6$ times, on-off ratio: 0.5s: 0.5s


## CHARACTERISTICS

Operate Time(at nominal voltage)		$\leq 35\text{ms}$
Release Time(at nominal voltage)		$\leq 15\text{ms}$
Insulation Resistance		$> 1000 \text{ M}\Omega$ (at 1000 VDC)
Dielectric Strength	Between Coil and Contacts	4,000 VAC, 50/60 Hz (1min)
	Between Open Contacts	4,000 VAC, 50/60 Hz (1min)
Vibration		10Hz ~ 500Hz, 49 m/s <sup>2</sup>
Shock Resistance	Functional	196 m/s <sup>2</sup>
	Destructive	490 m/s <sup>2</sup>
Ambient temperature		-40°C ~ 85°C
Humidity		5%RH to 85%RH
Weight		Approx 570g


## ORDERING INFORMATION

	<b>CH</b>	<b>EV</b>	<b>- P</b>	<b>500</b>	<b>/ E-</b>	<b>12</b>	<b>C</b>	<b>A</b>	<b>1</b>	<b>, XXX</b>
Company Code	CH: Churod									
Application Area	EV: Electric Vehicle									
Series Code	P: P Series									
Load Current	500: 500A									
Load Voltage	E: 1000VDC									
Coil Specification	12: 12VDC; 24: 24VDC									
Coil Termination	C: Connector									
Contact Type	A: Form A									
Load Termination	1: Screw Terminal Female									
Characteristic Code	Blank or Other Customer Requirements									

## OUTLINE DIMENSION

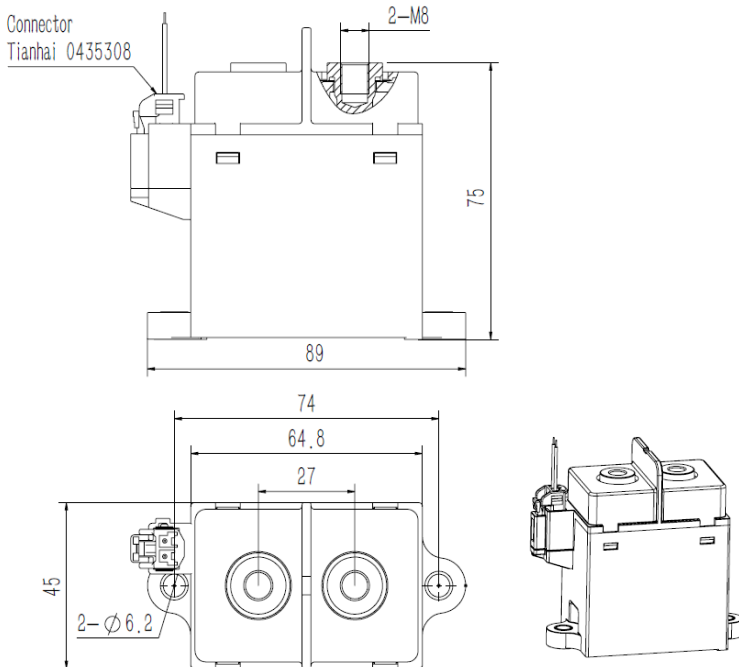

## WIRING DIAGRAM

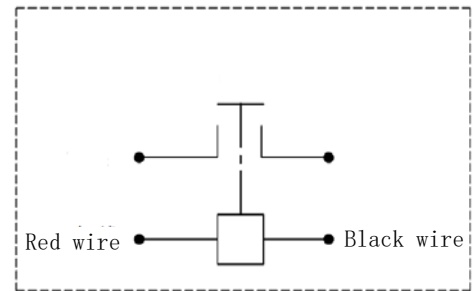


Note: The coil and the load have no polarity

Note: All unspecified tolerance according to following table.

Outline dimensions hadn't specified tolerance	
Outline Dimensions	Tolerance
$\leq 10$	$\pm 0.3$
10 ~ 50	$\pm 0.6$
$> 50$	$\pm 1$

## COIL TERMINATION:CONNECTOR

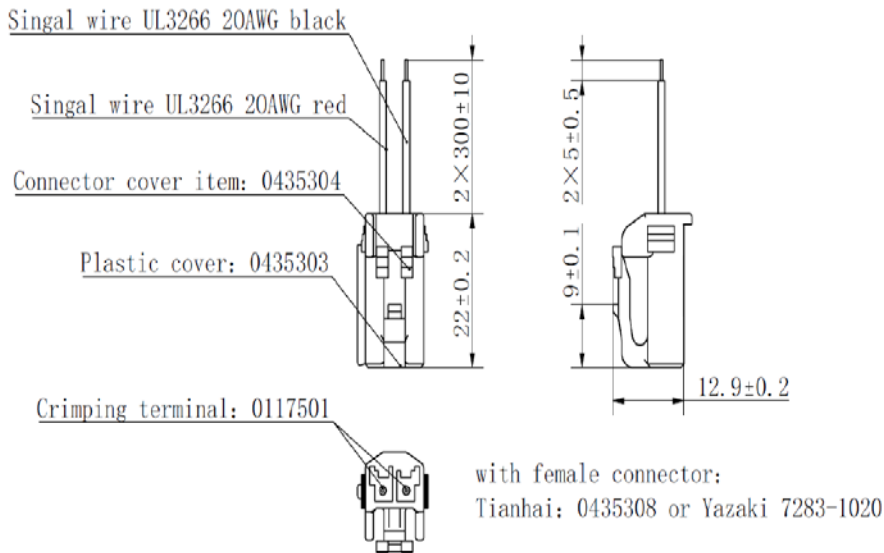

## INSTALLATION INFORMANTION

Load Terminal Installation				
Installation Mode	Selection Screw	Torque	Copper Busbar Diameter	Copper Busbar Thickness
M8 Screw	M8 Combined Bolt	9 N·m ~11N·m	Ø 8.0 mm~Ø 8.5 mm	3.0mm~5.0 mm

Relay Installation		
Mounting Type	Horizontal or vertical direction	Mounting Hole Size
Installation Mode	M6 Screw	
Torque	3N·m ~4N·m	

## ENGINEERING NOTES

1. Unless otherwise explicitly stated, the standard environment conditions for measurement or testing are listed as followings:

Ambient temperature is 23°C±5°C.

Atmospheric pressure is 96× (1±10%) kPa.

Relative humidity is 25% RH ~ 75% RH.

2. In order to curb the reverse electromotive force of coil, a nonlinear resistor is recommended to use (ZNR is recommended, the max energy tolerance:≥1J. Voltage: 1.5~2 times the rated voltage) . Please be noted that a diode will make the release time of relay increase, which should lead to the degradation of cutting-off capability.Relay products with circuit board do not need to add a device to curb the reverse electromotive force of the coil.

3. The rating load of contact is resistive load. Please assure a surge absorption device together with inductive load when using the L/R≥1ms inductive load (L Load), otherwise it may lead to the decrease of electrical endurance and defective switch.